

# API

## RADIAN 3D Laser Tracker Systems





## A FOCUS ON AUTOMATION

The API industrial laser tracker legacy continues with the latest RADIAN™ tracker series offering the smallest, lightest and most accurate portable trackers on the market allowing both faster and easier measurements.

API's compact and rigid UNIBODY tracker design includes shaft mounted laser, motors, and encoders. The UNIBODY shaft-mounted laser innovation minimizes Abbe offset errors, while also housing laser source, optics, camera and major head electronics in the center of the tracker body. The central location of all heat sources, allows rapid distribution of heat throughout the body during warm-up or drastic ambient temperature variations. This ensures the tracker maintains constant and symmetrical heat equilibrium throughout its operation, resulting in a shorter warm-up time and superior measurement stability.

**FOR MORE THAN  
30 YEARS  
API HAS PIONEERED  
LASER-BASED  
EQUIPMENT FOR  
MEASUREMENT  
AND CALIBRATION**

The rigid UNIBODY instrument casting offers innovative "air-over cooling" minimizing thermal effects, which provides increased temperature stability, faster start-up times, and further reducing instrument error enhancing overall measuring performance. Competitive trackers, with side-mounted lasers, create unbalanced heat sources requiring complex and lengthy warm-up routines involving extended thermal stabilization periods before accurate measurements can be performed.

API's integrated controller offers cable-less and hazard-free tracker operation in confined spaces. Onboard Wi-Fi reduces system setup and provides seamless operation.

API's wide-angle iVision™ fast autolock allows rapid recapture of lost laser beam providing effortless usability for difficult to access and interrupted line of sight measurements. The combination of onboard and external batteries provide 8 hours of continuous operation.

## A PASSION FOR PRECISION

RADIAN Pro, Plus, and Core models provide a solution to match every customer application and budget for trusted large-scale portable coordinate metrology solutions. An extended range of hand-held tactile and laser scanning probes compliment the RADIAN's measurement and reverse engineering capabilities further extending the RADIAN tracker measurement reach.

RADIAN 6D trackers can be enhanced with calibration tools to perform dynamic calibration and tracking of industrial robots and machine tools providing enhanced performance of manufacturing processes by reducing process variation.



LASER TRACKING SYSTEM  
1988



TRACKER 2  
1999



TRACKER 2 PLUS  
2002



TRACKER 3  
2005



RADIAN  
CURRENT






Dr. Kam Lau  
API CEO

## A VISION FOR INNOVATION

For more than 30 years API have pioneered laser-based equipment for measurement and calibration. API founder and CEO, Dr. Kam Lau, invented the laser tracker while working at USA's National Institute of Standards and Technology (NIST) to allow industrial robot accuracies to be determined. API shipped the world's 1st Industrial laser tracker to Boeing in 1988 and subsequently delivered the world's 1st 6D industrial laser tracker in 1989. API licensed its 3D laser tracker technology under a commercial agreement with Wild/Kern (now Leica) in 1989 allowing API to concentrate efforts on 5/6D laser tracker solutions for industrial manufacturing applications.

Today API is a global company with its laser trackers continuing to be the benchmark for metrology Automation, Precision and Innovation. API measurement and calibration products are at the heart of manufacturing organizations world-wide ensuring product quality and performance.

### RADIAN

	PRO 	PLUS 	CORE 
Laser Technology - ADM/IFM	ADM/IFM - 3D/6D	ADM - 3D/6D	ADM - 3D
Maximum Distance Range (Diameter)	20m / 50m / 80m*	50m / 80m*	50m / 80m*
Wireless Operation		✓	✓
Ethernet	✓	✓	✓
Hand-Held Probing (vProbe)	✓	✓	
Hand-Held Scanning (iScan)	✓		
Live Camera View	✓		
Integrated Controller		✓	✓
Vertical, Horizontal, Inverted Operation	✓	✓	✓
Wide Angle iVision Fast Autolock	✓	✓	✓
Battery Operation		8 Hours	8 Hours
Warranty	2 Years	2 Years	2 Years

\*Optional

# RADIAN LASER TRACKER TECHNICAL FEATURES



# RADIAN MEASUREMENT AND ACCESSORIES



## SMR MEASUREMENT

API break resistant Spherically Mounted Retroreflectors (SMR) are constructed with a one-piece optic eliminating risks associated with glass panels shifting, separating or fracturing and can track over 80m with optical centering accuracy down to  $\pm 2.5$  microns offering high accuracy line of sight measurement.



## HANDHELD PROBING

The API vProbe™, a hand-held, light-weight, wireless tactile probe with easy-hold grip which allows the laser tracker to perform extended coordinate measurement functions by measuring intricate features or part characteristics outside the line of site of the tracker set-up, providing fast and accurate measurements. The vProbe offers more versatility than a portable arm CMM and inherently more suitable for larger parts. A stylus toggle switch for dual locations with LED indication makes measurement quick and convenient whether inside, behind, or underneath a part. Dynamic tactile scanning capability provides instant coordinate feedback with integrated battery for 6 hours of measurement activity. Styli lengths up to 500mm can be accommodated.



vProbe comes standard with the Radian Plus tracker.



## HANDHELD SCANNING

Integrated with an API 6DoF laser tracker, the innovative API iScan™ wireless hand-held laser line scanner offers a fast, accurate and more productive solution to generate component point-clouds. Digitizing rates of up to 32,000 points/second and capable of scanning both reflective and dark surfaces, iScan features 360° yaw and roll to achieve infinite sensor positioning. Simple one-button operation provides effortless scanning functionality and also offers tactile probing providing even greater tracker measuring flexibility.



## RADIAN ACCESSORIES

	PRO 	PLUS 	CORE 
SMR Measurement	✓	✓	✓
vProbe Hand-Held Probing	✓	✓	
iScan Hand-Held Laser Scanner	✓		
Active Target	✓	✓	
Smart Track	✓	✓	

All accessories have a measuring range up to the maximum tracking distance of the respective laser tracker. Built-in 6DoF sensor allows tracker accuracy to be maintained throughout its entire operating distance.



API 2 Year Warranty - API offers the industry benchmark warranty on its Radian laser trackers and accessories for a period of 24 months on parts and labor. Full terms and conditions available upon request.


# RADIAN AUTOMATION AND CALIBRATION

Integrated API 6DoF laser tracker within robotic machining, inspection, and guidance cells provide real-time adaptive control offering improved metrological performance and improved quality of manufacturing processes.



## Active Target™

Active Target™ is a battery-powered self-orientating motorized 360° rotation SMR that locks onto the laser tracker and automatically orientates to the laser beam allowing for automated tracking and measurements of machine tools, industrial robots, or automation where a standard SMR cannot perform.

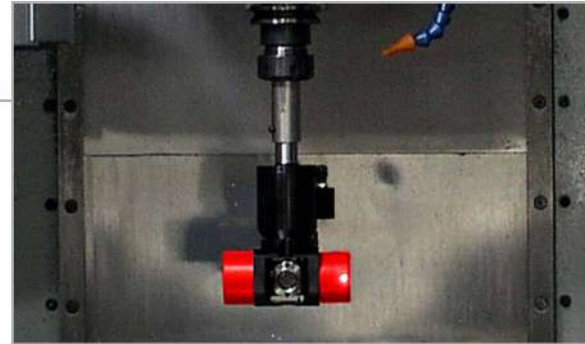

**CALIBRATION:** API 6DoF laser trackers combined with unique API calibration tools provide dynamic calibration and tracking of industrial robots and machine tools providing enhanced performance of manufacturing processes by reducing process variation.



## SmartTrack™

SmartTrack™ provides automatic 6DoF measurement for dynamic accuracy applications by determining the position (x, y, z) and angular orientation (pitch, yaw, roll) of a tracked point in real-time revealing the true position and orientation of a moving target such as a robotic end-effector. Applications include machine tool and robot calibration and dynamic robot accuracy enhancement.



# LASER TRACKER APPLICATIONS

Each manufacturing industry sector has unique metrology requirements. The API RADIAN laser tracker range and measurement accessories offer a highly flexible, portable coordinate measuring solution with applications across all industries. API has customers globally in all sectors and has accumulated a wealth of application experience in aerospace, automotive, energy, heavy machinery, agricultural equipment, military & defense, machine tools, automation and tooling.

RADIAN excels at high-definition surface scanning with feature extraction to automation and machine control; from hidden-point probing to traditional dynamic 3D reflector measurement: the Radian is the first-choice of laser tracker system in a wide range of industries.

- Alignment & Calibration
- Part Measurement
- Jigs, Fixture & Tooling Inspection
- Reverse Engineering
- Adaptive Control
- Robot Tracking






# LASER TRACKER SUSTAINABILITY

Manufactured in the USA, all RADIAN laser trackers are supplied with the industry's most comprehensive 2 year parts and labor warranty. API offers all-inclusive tracker calibration and maintenance contracts that can also include our loaner tracker program and advance reservation calibration program.

Supported globally through subsidiary offices in Europe, China, India, Brazil and master reseller partnerships, API offers the level of support demanded by our sophisticated international customers. We are where you are.

# TECHNICAL SPECIFICATIONS



	PRO 	PLUS 	CORE 
Working Range	ADM/IFM - 3D/6D	ADM - 3D/6D	ADM - 3D
Rotational Envelope	20m / 50m / 80m	50m / 80m	50m / 80m
Horizontal (Infinite)	±320° (640°)	±320° (640°)	±320° (640°)
Vertical (Infinite)	-59° - +79° (138°)	-59° - +79° (138°)	-59° - +79° (138°)
Data Output Rate	1000 points/sec.	1000 points/sec.	1000 points/sec.
<b>Distance Measurement Performance</b>			
Resolution	0.5 µm	0.5 µm	0.5 µm
Accuracy (MPE)	10µm or 0.7µm/m*	15µm or 0.7µm/m*	15µm or 0.7µm/m*
IFM Accuracy	0.5µm/m	not applicable	not applicable
<b>Angular Measurement Performance</b>			
Volumetric Accuracy (MPE)	10µm + 5µm/m	15µm + 5µm/m	15µm + 5µm/m
Precision Level Accuracy	±2 arc seconds	±2 arc seconds	±2 arc seconds
Maximum Radial Velocity	180°/sec	180°/sec	180°/sec
Maximum Radial Acceleration	180°/sec <sup>2</sup>	180°/sec <sup>2</sup>	180°/sec <sup>2</sup>
<b>Autolock Performance</b>			
iVision Field of View	30° (diagonal)	30° (diagonal)	30° (diagonal)
Acquisition Range	2m – 40m	2m – 40m	2m – 40m
Accuracy	10µ or 0.7µm/m*	10µ or 0.7µm/m*	10µ or 0.7µm/m*
<b>Attributes</b>			
Tracker Size	177mm <sup>2</sup> x 355mm	198mm <sup>2</sup> x 430mm	198mm <sup>2</sup> x 430mm
Tracker Weight	9.0 Kg	10.9 Kg	10.9 Kg
Controller Size	110 x 177 x 355mm	Integrated	Integrated
Controller Weight	3.2 Kg	Integrated	Integrated
Combined Weight	12.2 Kg	10.9 Kg	10.9 Kg
Transport Case	610x508x290mm	559x406x254mm	559x406x254mm
Total Transport Weight	28.2 Kg	22.7 Kg	22.7 Kg
WiFi		✓	✓
Ethernet	✓	✓	✓
Laser Emission	Class II IEC60825-1	Class II IEC60825-1	Class II IEC60825-1
Warm-up Time	15 minutes	15 minutes	15 minutes
<b>Power Specifications</b>			
Power Supply Voltage	110/230V ±10%	110/230V ±10%	110/230V ±10%
Power Consumption	100W	60W	60W
Internal Battery		✓	✓
External Power Pack		✓	✓
Continuous Operation Battery Life	-	8 hours**	8 hours**
<b>Environmental</b>			
Operating Temperature	-10°C to 45°C	-10°C to 45°C	-10°C to 45°C
Relative Humidity	10–95%***	10–95%***	10–95%***
Altitude	-700m to 3000m	-700m to 3000m	-700m to 3000m
IP Rated		✓	✓

\*Whichever is greater \*\*Hot swappable with battery pack \*\*\*Non-condensating

# TECHNICAL PERFORMANCE

All specifications are calculated per the ASME B89.4.19 standard. Variation in air temperature is not included. Quoted values represent Maximum Permissible Error (MPE).

The typical accuracy values represent expected measuring performance.

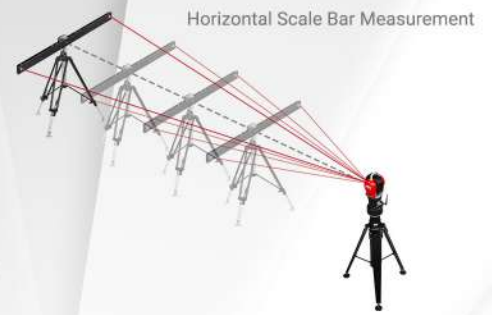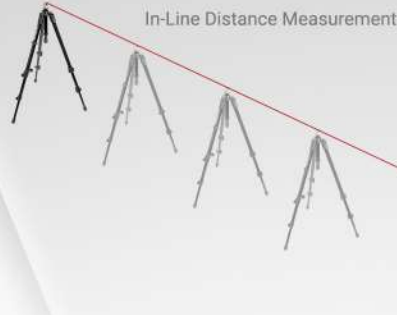

## In-Line Distance Measurement

Range	PRO				PLUS		CORE	
	MPE (ADM)	Typical	MPE (IFM)	Typical	MPE	Typical	MPE	Typical
2-5m	10µm	5µm	2.5µm	1.5µm	15µm	8µm	15µm	8µm
2-10m	10µm	5µm	5µm	3µm	15µm	8µm	15µm	8µm
2-20m	14µm	7µm	10µm	5µm	15µm	8µm	15µm	8µm
2-25m	18µm	9µm	12.5µm	7µm	18µm	9µm	18µm	9µm
2-30m	21µm	11µm	15µm	8µm	21µm	11µm	21µm	11µm
2-35m	25µm	13µm	17.5µm	9µm	25µm	13µm	25µm	13µm
2-40m	28µm	14µm	20µm	10µm	28µm	14µm	28µm	14µm
2-50m	35µm	18µm	25µm	13µm	35µm	18µm	35µm	18µm
*2-60m	42µm	21µm	30µm	15µm	42µm	21µm	42µm	21µm
*2-80m	55µm	28µm	40µm	20µm	55µm	28µm	55µm	28µm

## Horizontal Scale Bar Accuracy\*\*

Range	PRO				PLUS		CORE	
	MPE (ADM)	Typical	MPE (IFM)	Typical	MPE	Typical	MPE	Typical
2m	28µm	14µm	28µm	14µm	35µm	18µm	35µm	18µm
5m	49µm	25µm	49µm	25µm	57µm	29µm	57µm	29µm
10m	85µm	43µm	85µm	43µm	92µm	29µm	92µm	29µm
20m	156µm	78µm	156µm	78µm	163µm	82µm	163µm	82µm
25m	191µm	96µm	191µm	96µm	198µm	99µm	198µm	99µm
30m	226µm	113µm	226µm	113µm	233µm	117µm	233µm	117µm
35m	262µm	131µm	262µm	131µm	269µm	135µm	269µm	135µm
40m	297µm	149µm	297µm	149µm	304µm	152µm	304µm	152µm
50m	368µm	184µm	368µm	184µm	375µm	188µm	375µm	188µm
*60m	438µm	219µm	438µm	219µm	445µm	223µm	445µm	223µm
*80m	580µm	290µm	580µm	290µm	587µm	294µm	587µm	294µm

\*Requires 80m range option    \*\*2.3m Scale Bar Length



15000 JOHNS HOPKINS DRIVE, ROCKVILLE, MD 20850, USA  
 PHONE: 240.268.0400 • INFO@APIMETROLOGY.COM  
 APIMETROLOGY.COM

API EUROPE  
 +49 (0) 6221-729-805-0  
 EUROPE@APIMETROLOGY.COM

API CHINA  
 +86 10-59796858  
 CHINA@APIMETROLOGY.COM

API BRASIL  
 +55 12-3209-0675  
 BRASIL@APIMETROLOGY.COM

API INDIA  
 +91 020.4860.7480  
 INDIA@APIMETROLOGY.COM